YORK S3

KU061D

CE UNI EN ISO 20345:2012 S3 SRC

Low safety shoe, back WRU leather thickness 1,8-2,0 mm.
Perspiring and abrasion resistant fabric lining.
Shoe with refracting fabric insert.
Soft, lined and padded tongue.

TOECAP 200J polymeric **composite non-thermic** according to EN 12568
MIDSOLE flexible antiperforation composite fabric according to EN 12568
SOLE KUBE bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92,
to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**
INSOLE 4001, Comfort insole, perspiring, removable, anatomic, absorbing, antistatic ed antibacterial. Electrical resistance: *the values found prove that this insole is ESD*

Size 35-49 **Shoe weight** Sz 42 **gr. 500**

CERTIFICATIONS

TECHNOLOGIES AND MATERIALS

SECTORS

COMPONENTS AND AUTOMOTIVE
WOOD METAL CARPENTRY
LOGISTICS AND LIGHT INDUSTRY

SOLE

In order to avoid the high number of accidents caused by slipping danger, Giasco realized an **excellent anti-slipping product**.
This sole is called **Kube**, a young and sporty styled shoe equipped with a special gripping compound and specific cubic dowels with inverted profile in the outsole.
With thanks to these special characteristics Kube obtained the maximum certification against slipping: **jobs on inclined roofs** (UNI 11583:2015).

SRC

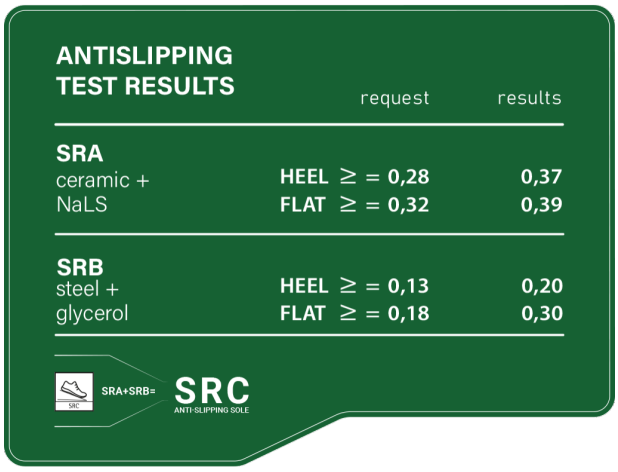
ANTISLIPPING
TEST RESULTS
request
results
SRA
ceramic +
NaLS
HEEL ≥ = 0,28
FLAT ≥ = 0,32
0,37
0,39
SRB
steel +
glycerol
HEEL ≥ = 0,13
FLAT ≥ = 0,18
0,20
0,30
SRA+SRB=
SRC
ANTI-SLIPPING SOLE